

Black Jade series

Double Glass BiFacial N-Type TOPCon Solar Module

435~460W

Model: UL-***M-96DDGN

Maximum Efficiency: **23.02%**



Bifacial Mono Module

Capable of generating power at back side,
80±5% efficiency of the front side



Longer Term Reliability

Passed the IEC63209-1:2021 standard test (With testing standards
2 to 3 times stricter than regular IEC requirements)



Outstanding Mechanical load Resistance

2mm+2mm front and back sides tempered glass, sturdy and
durable, resistant to hail impact, with a snow load of 5400Pa
and a wind load of 2400Pa



Anti-PID(potential induced degradation)

Passed anti-PID test under 85°C damp heat 85% relative
humidity for 192 hours





Lower LCOE

Lower shading and resistive loss Lower temperature coefficient



Full-Scenario Resilience

Proven through rigorous resistance tests for salt mist, ammonia
corrosion, sand & dust, and LeTID degradation

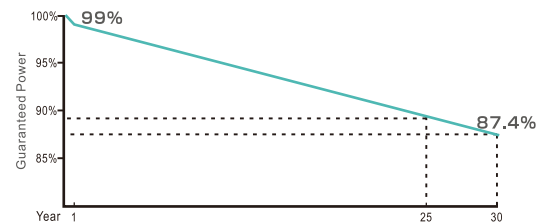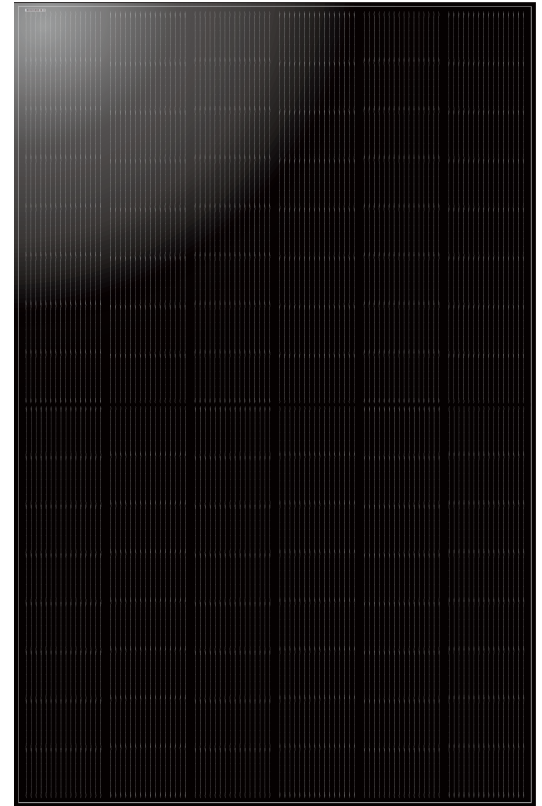

25 Year Product Warranty **1%** Power Degradation In The First Year

30 Year Linear Power Warranty **0.4%** Linear Power Degradation



CEC Listed



IEC 61215, IEC 61730

ISO 9001: 2015(Quality management systems)

ISO 14001: 2015 (Environmental management systems)

ISO45001: 2018 (Occupational health and safety)

UNI 9177 Fire Test: Class 1



Ulica Official Website

Add: No.238, Yunlin Middle Road, Gulin Town Haishu District, Ningbo, China PC

TEL: +86-574-28828999

Email: sales@ulsolar.com.cn

DOUBLE GLASS BIFACIAL 435~460Watt



ELECTRICAL SPECIFICATIONS

Module Type	UL-435M-96DDGN			UL-440M-96DDGN			UL-445M-96DDGN			UL-450M-96DDGN			UL-455M-96DDGN			UL-460M-96DDGN		
	STC*	NOCT*		STC*	NOCT*		STC*	NOCT*		STC*	NOCT*		STC*	NOCT*		STC*	NOCT*	
Maximum Power(Pmax)	W	435	330	440	333		445	337		450	341		455	345		460	349	
Maximum Power Voltage(Vmp)	V	29.21	26.87	29.35	27.00		29.48	27.12		29.61	27.24		29.75	27.37		29.85	27.46	
Maximum Power Current(Imp)	A	14.89	12.27	14.99	12.35		15.09	12.43		15.20	12.52		15.30	12.60		15.41	12.69	
Open-circuit Voltage(Voc)	V	34.70	31.58	34.84	31.70		35.00	31.85		35.14	31.98		35.29	32.11		35.36	32.18	
Short-circuit Current(Isc)	A	15.95	12.87	16.00	12.91		16.05	12.95		16.10	12.99		16.15	13.03		16.23	13.09	
Module Efficiency STC	%	21.77		22.02			22.27			22.52			22.77			23.02		

*STC:Cell temperature:25°C,Irradiance:1000W/m²,Ari mass:1.5G,Power measurement tolerance: ±3%
 *NOCT:Air temperature:20°C,Irradiance:1000W/m²,Ari mass:1.5G,Wind speed:1m/s

OPERATING PARAMETERS


Operating Temperature	-40°C~85°C
Maximum system voltage	DC1500V(IEC)
Maximum series fuse rating	30A
Nominal operating cell temperature	43±2°C
Power tolerance	0~+5Watt

TEMPERATURE RATINGS

Temperature coefficients of Pmax	-0.29%/°C
Temperature coefficients of Voc	-0.25%/°C
Temperature coefficients of Isc	0.046%/°C

I-V CURVE

I-V characteristics at different irradiances (reference to 460 W)

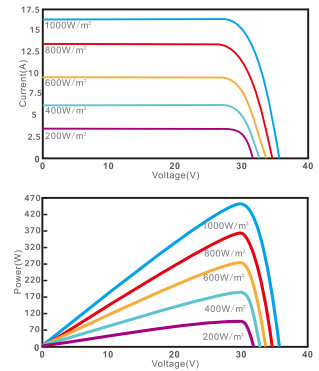

REAR SIDE POWER GAIN(REFERENCE TO 460W FRONT SIDE)

Pmax/W	460	483	506	529	552	575	598
Pmax gain	0%	5%	10%	15%	20%	25%	30%
Voc/V	35.36	35.36	35.36	35.36	35.36	35.36	35.36
Isc/A	16.23	17.04	17.85	18.66	19.48	20.29	21.10
Vmp/V	29.85	29.85	29.85	29.85	29.85	29.85	29.85
Imp/A	15.41	16.18	16.95	17.72	18.49	19.26	20.03

SPECIFICATIONS

Cell Type	N-type TOPCon Mono Half Cell	
No.of cells	96(6×8×2)	
Dimensions	1762*1134*30mm	
Weight	24.2kg	
Front Glass	2.0mm,Anti-Reflection Coating,High Transmission,Low Iron,Tempered Glass	
Back Glass	2.0mm,High Transmission,Low Iron,Tempered Glass	
Frame	Anodized Aluminium Alloy	
Junction Box	IP68,3diodes	
Connector	MC4 Compatible:PV-UL608 or Original:MC4-EVO2A or others _____	
Cable Length (Including Connector)	4mm² Short Cable: (+)400/(-)200mm or Long Cable:(+)1200/(-)1200mm or Customized Length _____	

PACKAGING INFORMATION



37 Pcs/Pallet
or 36 Pcs/Pallet



74 Pcs/Stack
or 72 Pcs/Stack



Length:1775mm
or Length:1775mm



Width:1140mm
or Width:1130mm




Height:2550mm
or Height:2540mm



Weight:1855kg/Stack
or Weight:1770kg/Stack



13 Stack/40HQ
962 Pcs/40HQ
or
13 Stack/40HQ
936 Pcs/40HQ

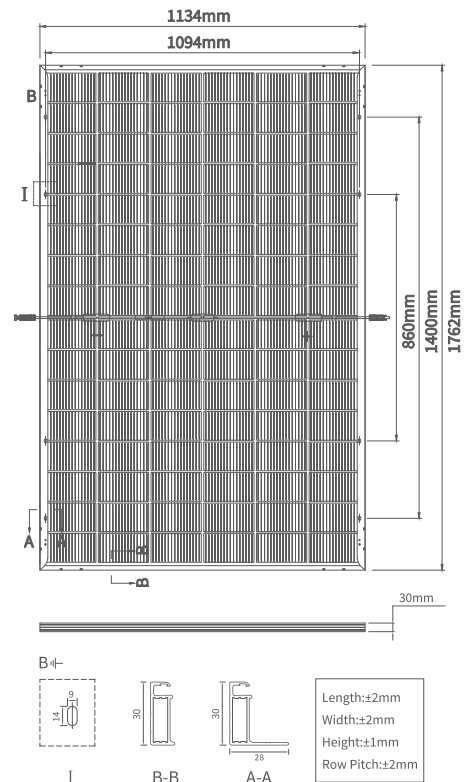

Specifications included in this datasheet are subject to change without notice.

Ulica Solar reserves the right of final interpretation.

Version number: UL-1762-96DDGNHH-30-ENS-V2.0